
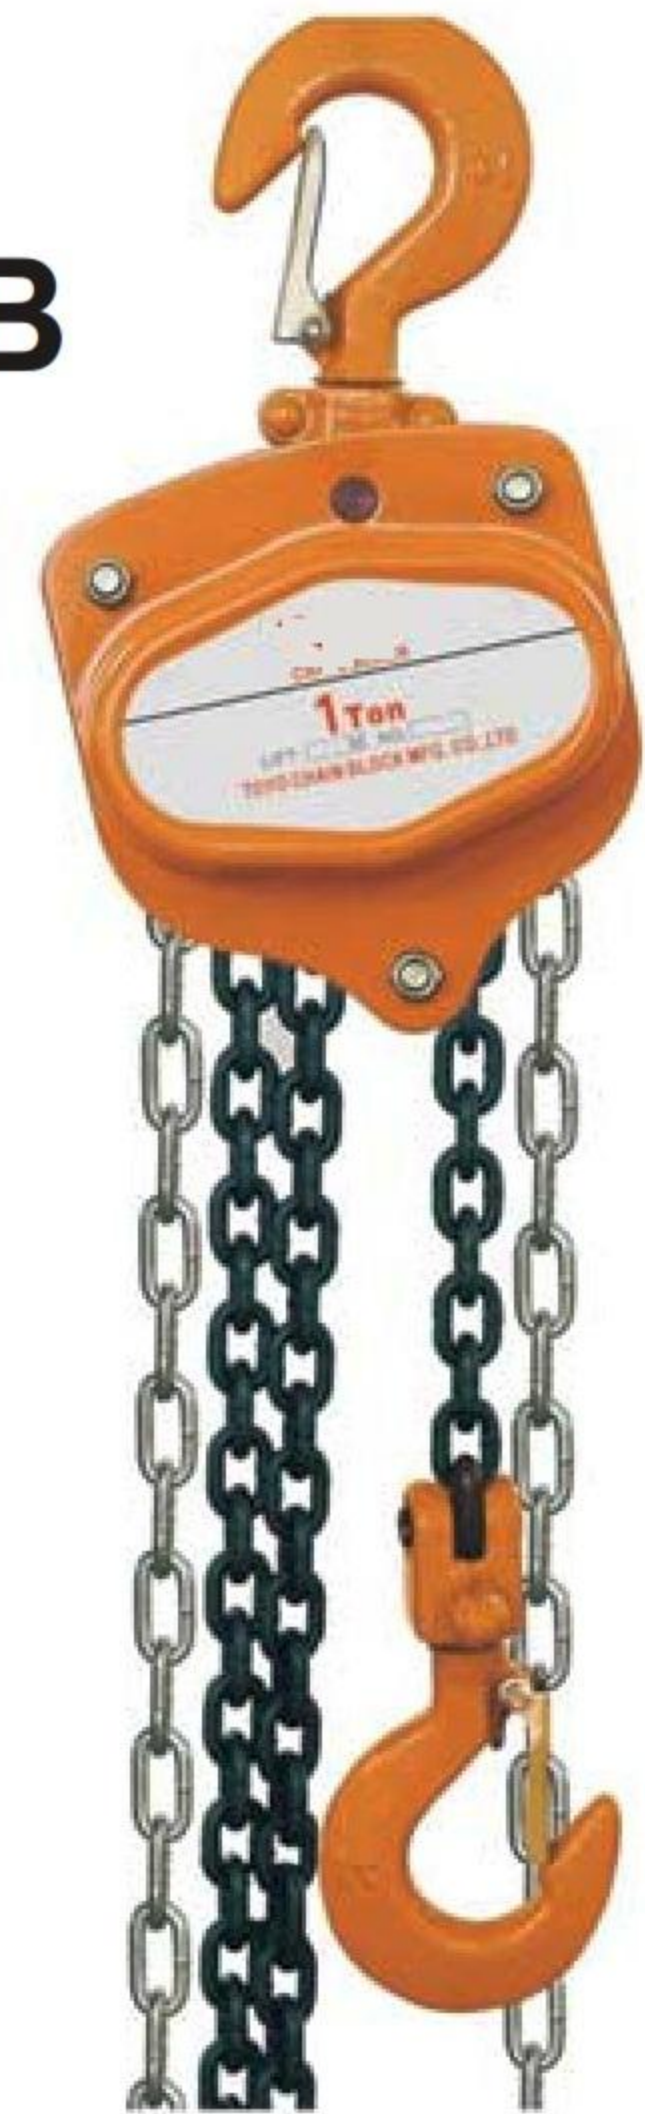


VC-B TYPE CHAIN HOIST

One of best selling hoist
Capacity ranges from 0.5t to 20t, heavy duty 30t, 50t is available
Heavy duty and compact design to meet all pertinent work standard
Reliable disc brake, premium grade alloy load chain and zinc plated hand chain as standard
Drop-forged and expertly heat treated hooks for great strength and long wearing

1. Light weight robust construction;
2. Low effort to lift maximum load;
3. Fully forged hooks;
4. Fully machines lift wheel;
5. ISO high grade alloy chain;
6. Zinc plated hand chain as standard;
7. Double cover protection;
8. Durable baked enamel paint protection;
9. Overload protection device available upon request.

MODEL : VC-B

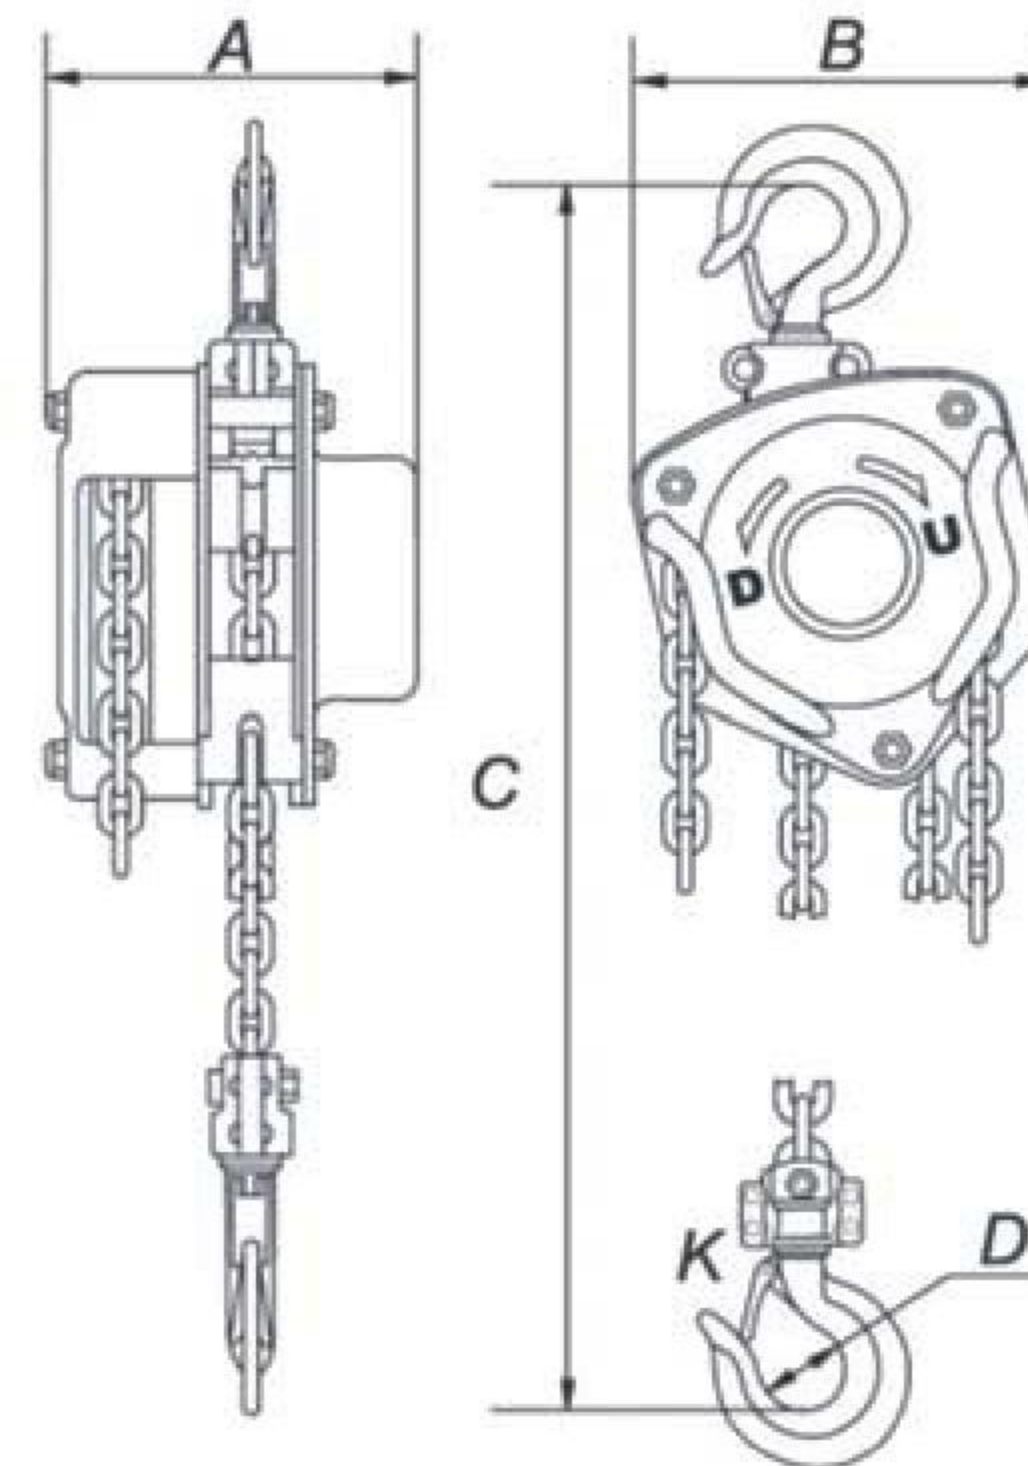

SPECIFICATION

Model		VC-B0.5	VC-B1	VC-B1.5	VC-B2	VC-B3	VC-B5	VC-B10	VC-B20	VC-B30	VC-B50
Capacity	load(t)	0.5	1	1.5	2	3	5	10	20	30	50
Standard	lift(m)	2.5	2.5	2.5	3	3	3	3	3	3	3
Running	testload(kn)	7.5	15	22.5	45	45	62.5	125	250	375	625
Effort Required to lift max. load (N)		200 (20.5)	320 (32.5)	360 (36.5)	365 (37)	385 (39)	435(44.3)	435 (44.3)	435x2 (44.3x2)	435x2 (44.3x2)	435x2 (44.3x2)
Load chain diameter number of falls (mm)		6.0x1	6.0x1	8.0x1	8.0x1	8.0x2	10.0x2	10.0x4	10.0x8	10.0x12	10.0x22
The distance of hand chain pulling when lifting height go up 1meter (mm)		32	40	72	72	144	158	316	636x2	948x2	1738x2
Net weight (kg)		8.4	11	16.2	18.5	25.6	42.8	79.5	193	220	1092
Extra weight meter of extra lift (kg)		1.7	1.7	2.3	2.3	3.7	5.6	9.7	19.4	26.4	48.4
Dimensions (mm) A		131	140	161	161	161	186	207	215	350	406
B		127	158	187	187	210	253	398	650	680	962
C		270	317	399	414	465	636	798	890	1380	2578
D		35	40	45	50	58	84	85	110	110	170
K		30	34	38	41	48	52	64	85	85	130
Packing measurement (L*W*H) (cm)		22x15x19.5	23x15x19.5	28x21x24	28x21x24	32x21x26	40x21x21	64x21x21	64x38x64	72x50x68	110x100x130