


Electric Chain Hoist

» Dimensions

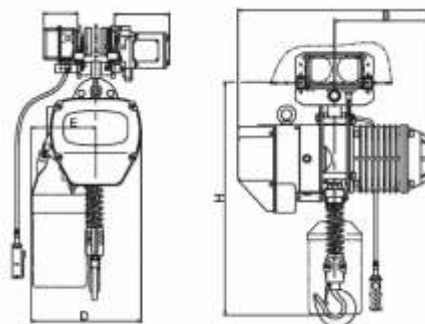

» Technical Parameters

Single Speed

Capacity (Ton)	Standard Lifting Height (m)	Lifting Speed (m/min)	Lifting Motor				
			Power (Kw)	Rotation Speed (r/min)	Phases	Voltage (V)	Frequency (Hz/s)
0.5	5	6.8	0.75	1440	3	440	50
1	5	6.6	1.5	1440	3	440	50
2	5	3.3	1.5	1440	3	440	50
3	5	4.4	3.0	1440	3	440	50
5	5	2.7	3.0	1440	3	440	50

» Size Specification

Single Speed

Capacity (Ton)	Unit (mm)											
	A	B	D	E	I	H	K	L	N	M	J	Chain
0.5	455	240	285	165	34	540	34	25	19	19	28	φ 6.3
1	520	260	300	176	42	650	42	32	24	24	32	φ 7.1
2	520	260	300	236	49	835	49	40	30	30	40	φ 7.1
3	615	295	430	320	59	950	59	48	35	35	48	φ10.0
5	615	295	430	325	60	1030	60	48	43	43	48	φ11.2



Remark : 1. Lifting height against customers's Requirement. 2. 60Hz/s Speed x 1.2

Electric Chain Hoist

500Kg~5Ton Hoist with Electric Trolley



» Dimensions

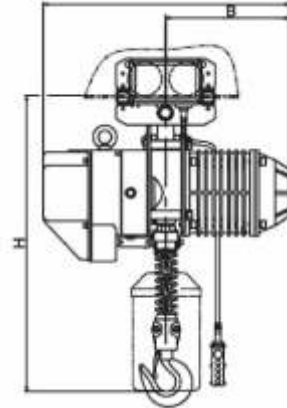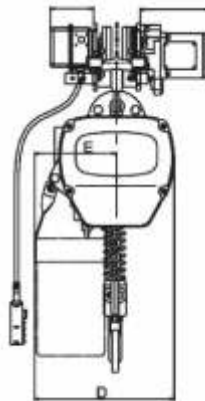

» Technical Parameters

Single Speed

Capacity (Ton)	Standard Lifting Height (m)	Lifting Speed (m/min)	Lifting Motor					Trolley Motor			
			Power (Kw)	Rotation Speed (r/min)	Phases	Voltage (V)	Frequency (Hz/s)	Power (Kw)	Rotation Speed (r/min)	Trolley Speed (m/min)	I-Beam (mm)
0.5	5	6.8	0.75	1440	3	440	50	0.4	1440	11/21	58-153
1	5	6.6	1.5	1440	3	440	50	0.4	1440	11/21	58-153
2	5	3.3	1.5	1440	3	440	50	0.4	1440	11/21	82-178
3	5	4.4	3.0	1440	3	440	50	0.75	1440	11/21	100-178
5	5	2.7	3.0	1440	3	440	50	0.75	1440	11/21	100-178

» Size Specification

Single Speed

Capacity (Ton)	Unit (mm)													
	H	A	B	D	E	I	K	L	N	W	U	R	T	Chain
0.5	610	455	240	285	165	31	34	25	19	206	111	142	231	φ 6.3
1	650	520	260	300	176	31	42	32	24	206	111	142	231	φ 7.1
2	815	520	260	300	236	36	49	40	30	237	127	142	231	φ 7.1
3	930	615	295	430	320	43	59	48	35	265	140	142	231	φ10.0
5	1015	615	295	430	325	54	60	48	43	296	156	142	231	φ11.2

Remark : 1. Lifting height against customers's Requirement. 2. 60Hz/s Speed =50Hz/s Speed x 1.2